

| OPERATION WHEN DIRECTLY CONNECTED TO CHIMNEY         |                      |
|--|----------------------|
| Tested according to                                  | EN 13229             |
| Nominal heat power                                   | 11 kW                |
| Efficiency   | > 80 %               |
| Consumption of wood                                  | - kg/h               |
| Mass flow of flue gas                                | - g/s                |
| <b>Average flue gas temperature</b><br>on the output | - °C                 |
| <b>Heat distribution</b>                             |                      |
| fireplace insert                                     | - %                  |
| door glass (single / double)                         | - / - %              |
| Required chimney pressure                            | - Pa                 |
| Required amount of combustion air                    | 30 m <sup>3</sup> /h |
| Minimum supply air grating cross-section             | 700 cm <sup>2</sup>  |
| Minimum outgoing air grating cross-section           | 850 cm <sup>2</sup>  |

| OPERATION WITH CONNECTED ACCUMULATION MASS  |                        |
|---|------------------------|
| Load of wood  | 4,5 kg                 |
| Total heat output of the burning chamber  | 16 kW                  |
| Mass flow of flue gas   | - g/s                  |
| <b>Average flue gas temperature</b><br>on the output <sup>1)</sup><br>past 2,4 m of ceramic accumulation system KMS 300 <sup>2)</sup> | - °C<br>- °C           |
| <b>Heat distribution</b>  |                        |
| fireplace insert  | - %                    |
| door glass (single / double)  | - / - %                |
| adjoining accumulation mass   | - %                    |
| Required chimney pressure   | 12 Pa                  |
| Minimum radiant area <sup>3)</sup>  | cca 4,5 m <sup>2</sup> |
| Required amount of combustion air   | 45 m <sup>3</sup> /h   |


| GENERAL TECHNICAL INFORMATION                                      |                           |
|--|---------------------------|
| Combustion air connection  | Ø 150 mm                  |
| Total weight / lining weight                                       | ca. 236 / 43 kg           |
| Use in non-ventilated accumulation builds according to craft rules | suitable                  |
| Meets values   | BlmSchV (Stufe2), 15a BVG |

- 1) The Hoxter products are available in the Austrian stove-calculation program for evaluation of firebrick accumulation systems.
- 2) Only a sample calculation! For accurate results is evaluation of each system in the KMS-calculation program from the Ortner company necessary.
- 3) Depends on accumulation period and material characteristics and its thickness. Calculated with heat emission of the radiant area ca. 500 W/m<sup>2</sup>.hr

# UKA 56/50/56/52h

Technical data  
Version 01/2018


M 1 : 10

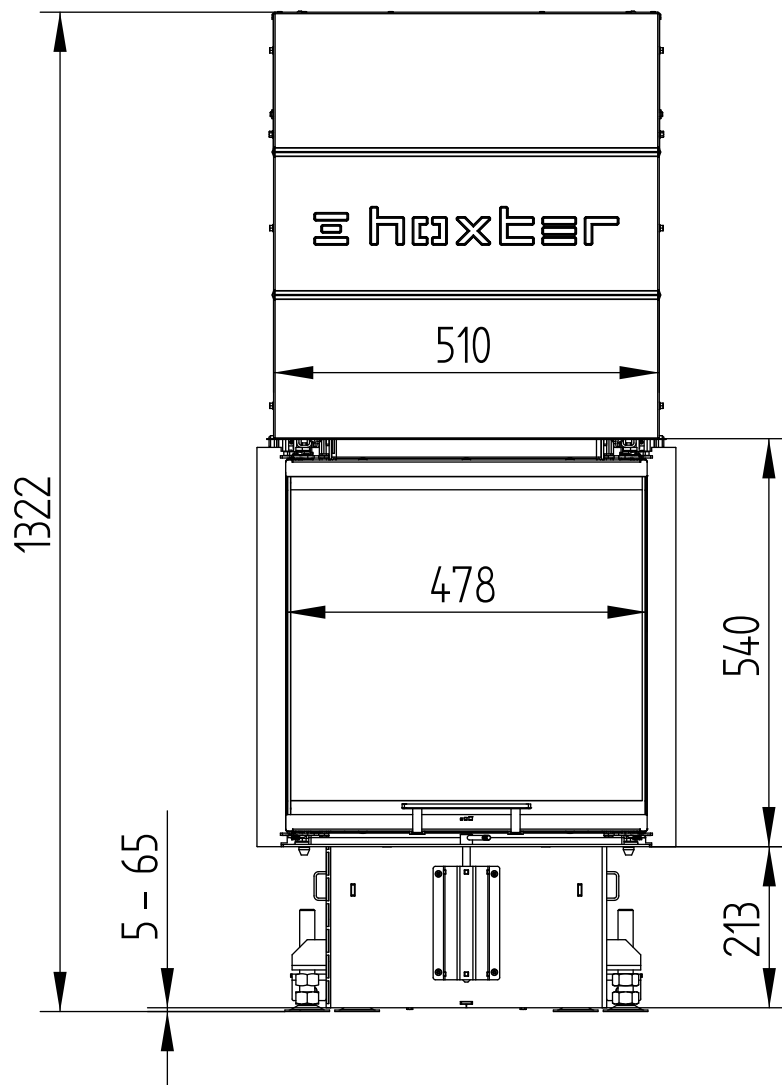

# UKA 56/50/56/52h

Technical data  
Version 01/2018


M 1 : 10

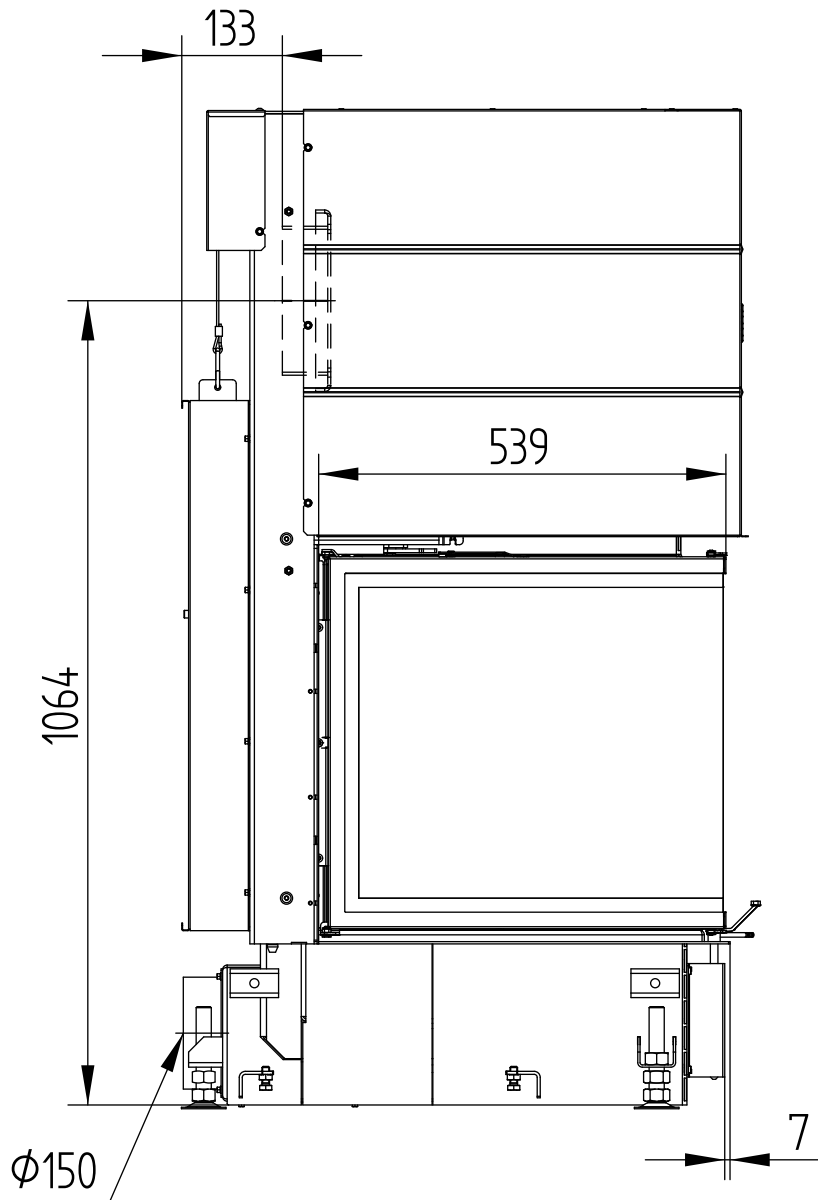

# UKA 56/50/56/52h

Technical data  
Version 01/2018

M 1 : 10

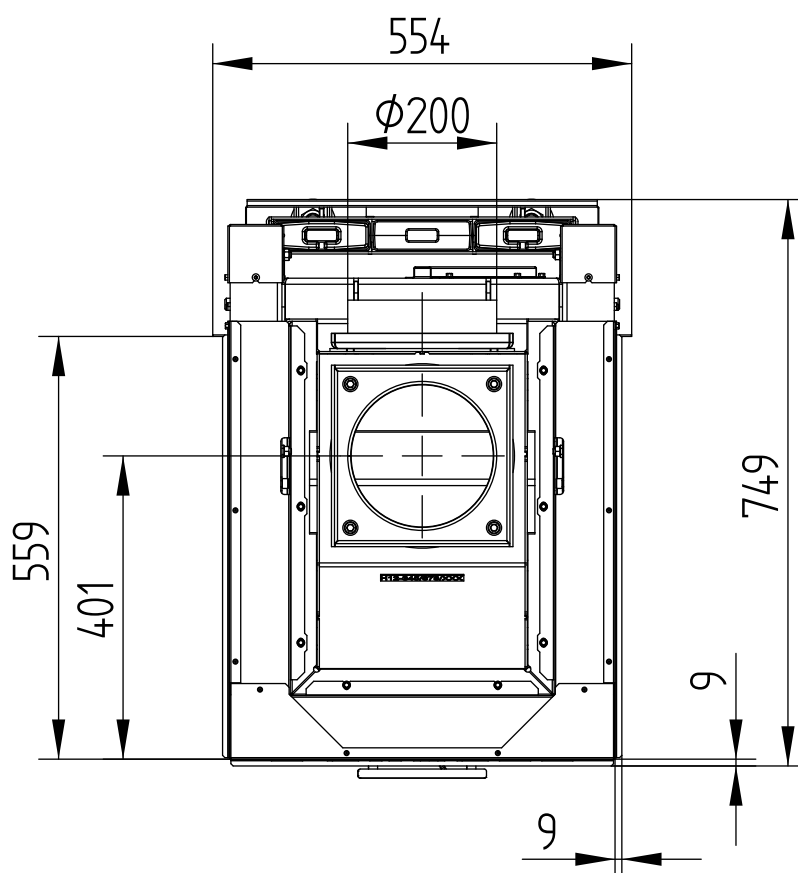


# UKA 56/50/56/52h

Technical data  
Version 01/2018

BUILD-ON FRAME 8-SIDED

M 1 : 10

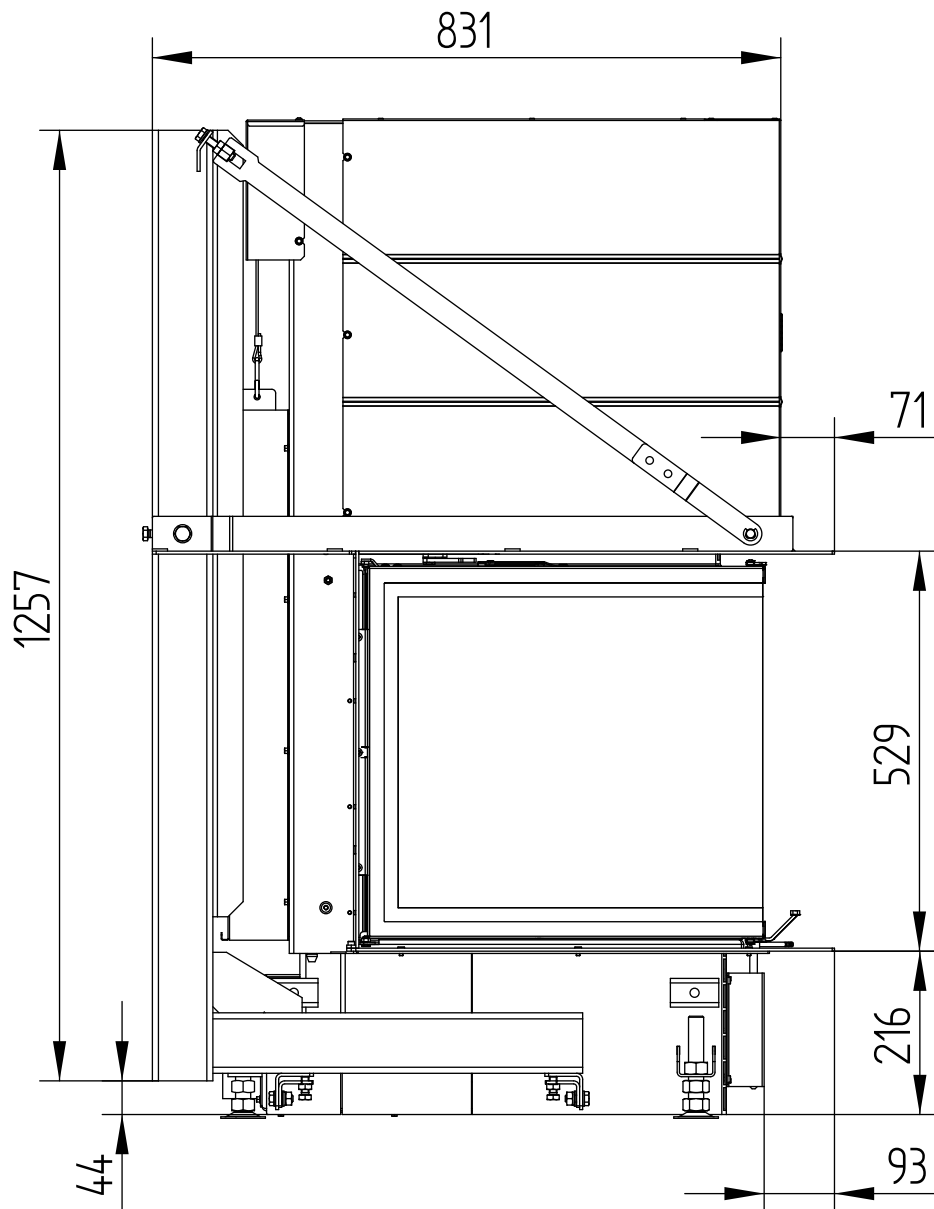


# UKA 56/50/56/52h

BUILD-ON FRAME 8-SIDED

Technical data  
Version 01/2018

M 1 : 10

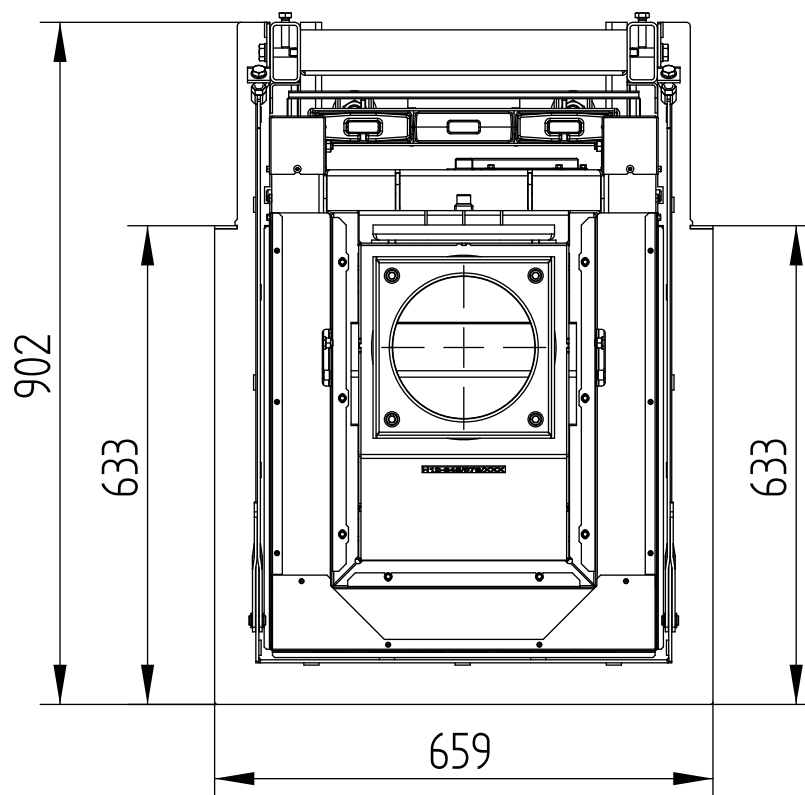


# UKA 56/50/56/52h

Technical data  
Version 01/2018

BUILD-ON FRAME 5-SIDED

M 1 : 10

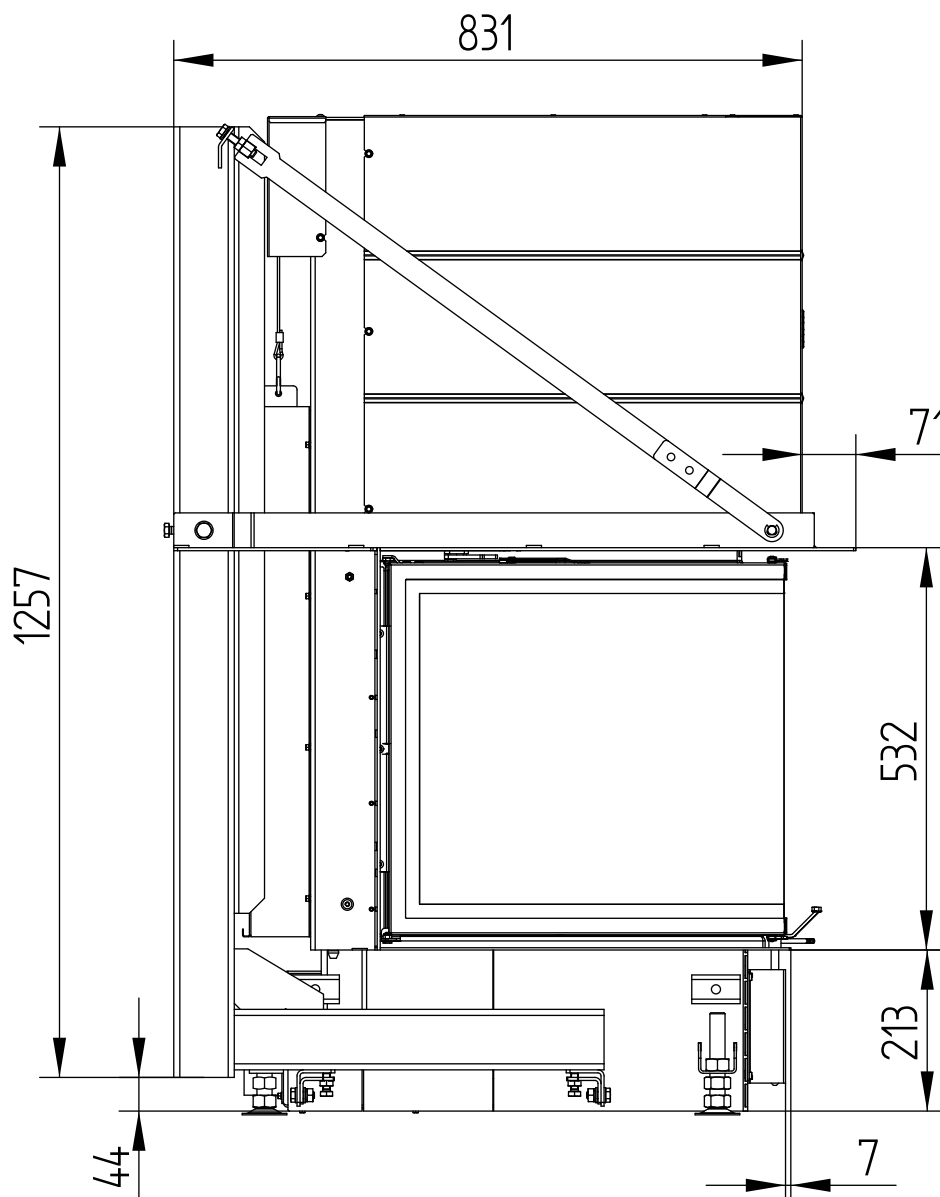

# UKA 56/50/56/52h

BUILD-ON FRAME 5-SIDED

Technical data  
Version 01/2018

M 1 : 10

